



NON SHRINKABLE

BUSCAP™

The Ultimate Insulation




Technical Qualification Report : QR 1022



NON SHRINKABLE

BUSHINGBOOT™

The Ultimate Insulation

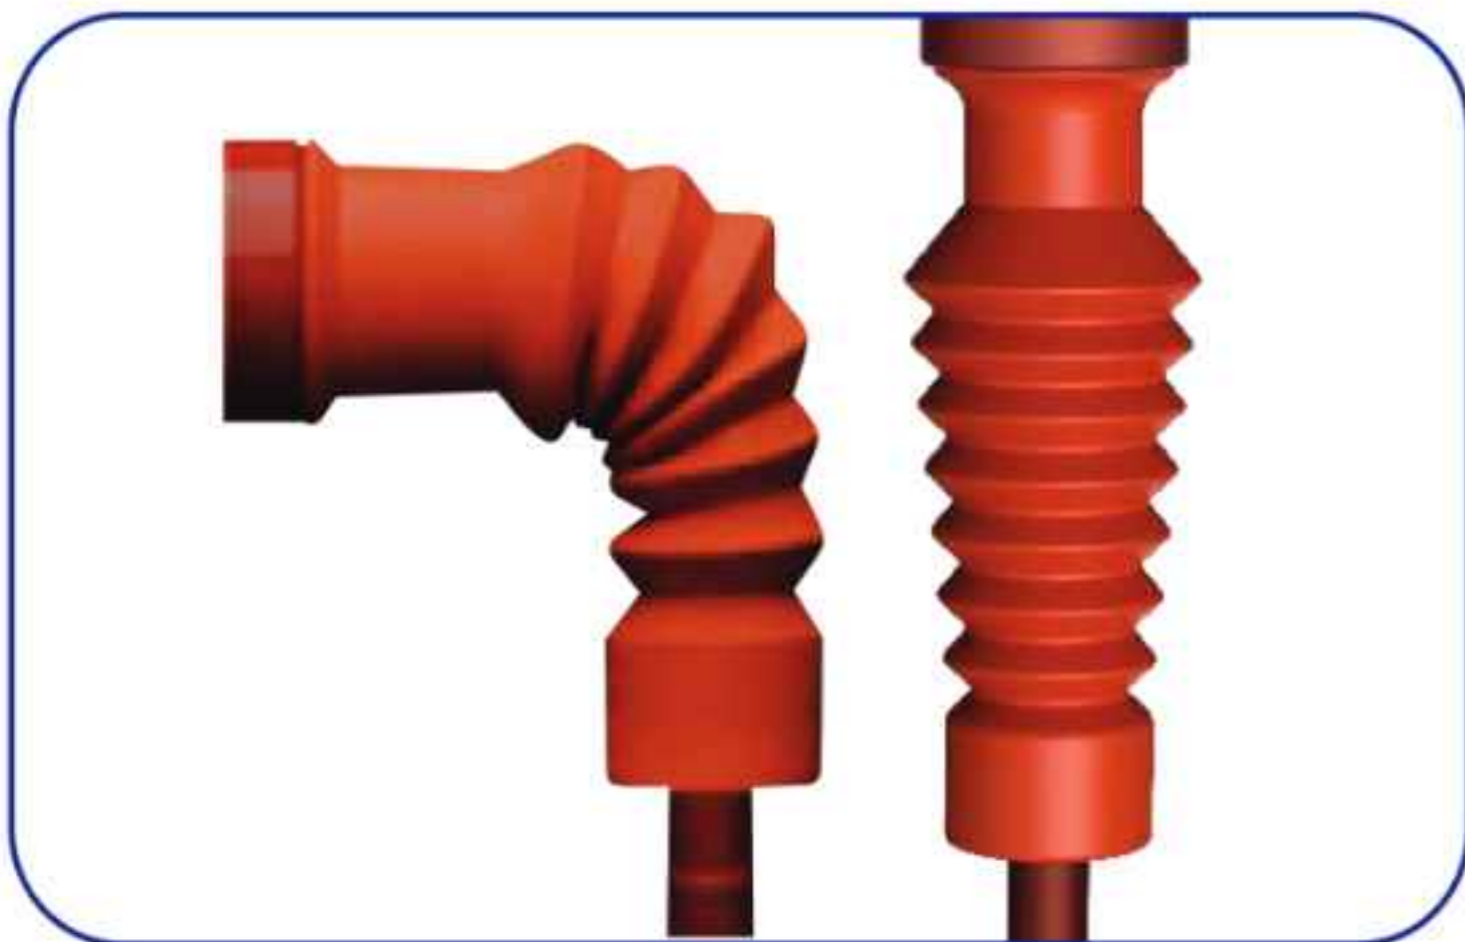

Bushing Boots are non-tracking elastomeric insulating boots which are used in conjunction with terminations. They fit over the bushings of switchgear, insulating the area between the cable connector in either right angled or straight bushing connections. They are designed to enhance the phase-to-phase and phase-to-earth insulation. The boots can be used up to 25 KV application & protect against flashover or surges induced in switchgear & transformer boxes.

BUS BAR END CAP

Bus Cap is flexible, re-usable, electrical insulating End Cap, used to cover the end of live Bus Bars. These End Caps can be installed, removed or replaced in few minutes. Made from Polyvinyl Chloride (PVC) material, it is formulated specially for electrical application at high voltage.

Selection Chart

Gala Code	Busbar Size (mm)	A (mm)	W (mm)	L (mm)
GBC 1	15 x 5	15	5	20
GBC 2	20 x 5	20	5	20
GBC 3	25 x 5	25	5	20
GBC 4	30 x 10	30	10	30
GBC 5	40 x 10	40	10	30
GBC 6	50 x 6	50	6	30
GBC 8	60 x 10	60	10	30
GBC 11	80 x 10	80	10	50
GBC 13	100 x 10	100	10	50
GBC 15	120 x 10	120	10	50
GBC 17	150 x 6	150	6	70
GBC 18	200 x 12	200	12	70


Selection Chart

PRODUCT CODE	TOTAL LENGTH	ID - BUSHING ENTRY	ID - CABLE ENTRY	THICKNESS
GSBB - 1	230 mm (min.)	50.5 mm (min.)	17.5 mm (min.)	2.5 mm (min.)
GSBB - 2	230 mm (min.)	50.5 mm (min.)	22.0 mm (min.)	2.5 mm (min.)

Technical Specification

AC High Voltage	35 kV for 5 Minute
Basic Impulse Level	95.0 kV
DC High Voltage	48 kV for 30 Minute
Bushing Diameter	46 - 70mm

Technical Drg.

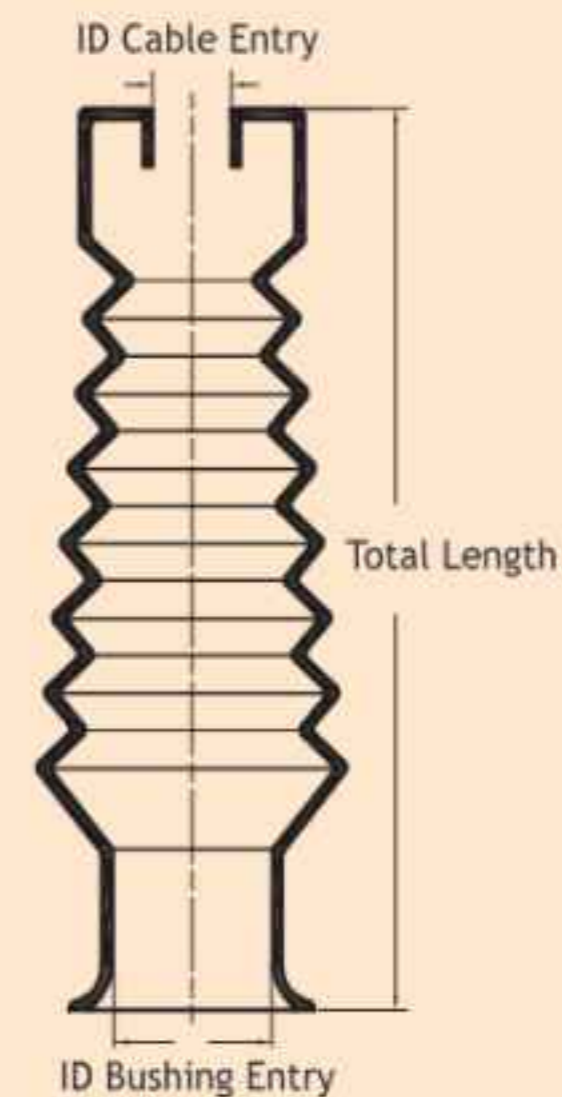

BUSHING BOOT



An ISO 9001, ISO 14001 & ISO 45001:2018 Certified Company

GALA THERMO SHRINK PVT. LTD.

M : 88791 22705 | E: info@galathermo.com | W: www.galathermo.com