



Un-screened Bushing Cap upto 11 kV

Bushing Cap for RMU extensible / GIS Bushing is used to seal and insulate the ends of Bushing & also protect it from ingress of water / moisture. The caps used in Bushing Cap are manufactured from high quality Cross-linked Non-tracking and Semiconductive Polyolefin material. Compatible with all types of Bushing. The caps need to be removed from the Bushing for new connections.

Screened Bushing Cap with Ground

Touch Proof Protective Cap is designed to electrically insulate and mechanically seal bushing interfaces. The cap can be used for permanent and temporary insulation on bushing end junctions.

Screened End cap is an accessory device designed to electrically insulate and mechanically seal bushing. When installed on the bushing and the drain wire is attached to ground, the Screened End cap provides a fully shielded, submersible insulating cover for energized bushings. The cap can be used for permanent or temporary installation on bushings, junctions or feedthrough devices.


Selection Chart : Unscreened Bushing Cap

| Gala Code | Ds (Min.) | Df (Max.) | Ls (Min.) | Tf (±10%) |
|-----------|-----------|-----------|-----------|-----------|
| GEK - 401 | 75 | 35 | 125 | 4.0 |
| GEK - 501 | 100 | 45 | 125 | 4.0 |

Selection Chart : Screened Bushing Cap

| Gala Code | Ds (Min.) | Df (Max.) | Ls (Min.) | Tf (±10%) |
|------------|-----------|-----------|-----------|-----------|
| GSEK - 401 | 71 | 35 | 125 | 4.0 |
| GSEK - 501 | 96 | 45 | 125 | 4.0 |

D : Internal Diameter | s : As supplied | f : free recovered | L : Length
T : Thickness of Insulation Layer after free recovery
All dimensions are in mm

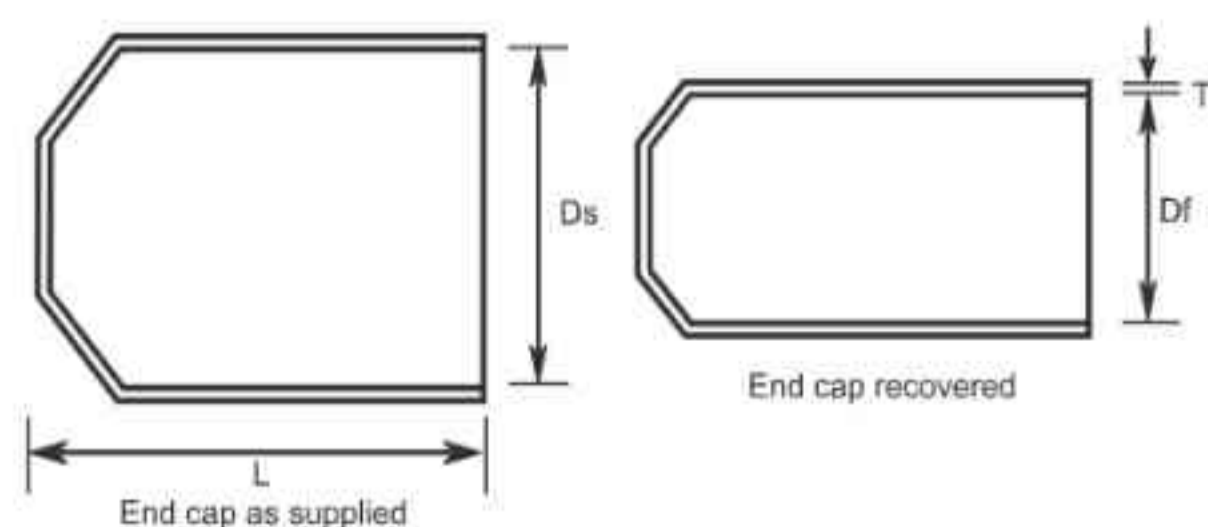

Screened Bushing Cap with Ground upto 24 kV

Technical Specification*

| PROPERTIES | TYPICAL VALUE | TEST METHODS |
|--|---|---------------|
| Physical | | |
| Tensile Strength | 12 N/mm ² (Mpa) (min.) | ASTM D638 |
| Ultimate Elongation | 350 % (min) | ASTM D638 |
| Density | 1.05 ± 0.2 gm/cm ³ | ASTM D792 |
| Hardness | 45 ±10 Shore D | ASTM D2240 |
| Water Absorption | 0.2 % (max.) | ASTM D570 |
| Thermal | | |
| Accelerated Ageing | (120°C for 500 hrs.) | ASTM D2671 |
| Tensile Strength | 11 N/mm ² (Mpa) (min.) | ASTM D638 |
| Ultimate Elongation | 300 % (min.) | ASTM D638 |
| Low Temperature Flexibility | No Cracking | ASTM D2671 |
| (-40°C for 4 hrs.) | | |
| Heat Shock (250°C for 30 min.) | No Cracking or flowing | ESI 09-11 IEC |
| Shrink Temperature | 125°C | 216 IEC 216 |
| Continuous Temperature Limit | -40 to +100°C | |
| Electrical (Applicable for Insulation Layer only) | | |
| Dielectric Strength | 12 kV/mm. (min) | ASTM D149 |
| Volume Resistivity | 1 x 10 ¹⁴ Ohm.cm (min) | ASTM D257 |
| Dielectric Constant | 5 (max.) | ASTM D150 |
| Resistant to Tracking & Erosion | No Tracking, erosion or flame failure up to 3.25 kV for 20 min. | ASTM D2303 |

