



Tamper Proof End Seal is Heat Shrink End Cap, used to seal the ends of all types of Cables & to protect it from ingress of water/moisture. The caps are manufactured from high quality cross linked polyolefin material.

### ❖ Tamper Proof Features / Benefits:

- Permanent Foolproof Seal to the Cable end.
- Can not be tampered, removed or re-used.
- Can be considered as Factory fitted Cable end seal.
- Customised Logo Printing with Special High Performance Non Removable Ink.
- **Warranty** of Cable length can be considered as void in case Cable is found without Tamper Proof end seal.
- Avoids unwanted customer claims for **Shortage/Pilferage** of Cable length.

Compatible with most commonly used Cable Jackets i.e. XLPE, PVC, PILC or Rubber Sheathed Cable.

Hot Melt adhesive lining provides permanent seal on irregular cable sheaths.

Excellent resistance to weathering, moisture, contamination and adverse environmental conditions, according to IP 68 (Ingress Protection).

- Valved End caps (V) available for pressurized application for Telecom cables.
- Special Relief valved End Caps (RV) available for degassing application in High Voltage Power cables.

### Technical Specification


PROPERTIES	VALUE	STANDARD
<b>Physical</b>		
Tensile Strength	12 N/mm <sup>2</sup> (Mpa) (min.)	ASTM D638
Ultimate Elongation	350 % (min)	ASTM D638
Density	1.05± 0.2 gm/cm <sup>3</sup>	ASTM D792
Hardness	45 ±10 Shore D	ASTM D2240
Water absorption	0.2 % (max.)	ASTM D570
<b>Thermal</b>		
Accelerated ageing	(120°C for 500 hrs)	ASTM D2671
Tensile Strength	11 N/mm <sup>2</sup> (Mpa) (min.)	ASTM D638
Ultimate Elongation	300 % (min.)	ASTM D638
Low Temperature Flexibility (-40°C for 4 hrs.)	No Cracking	ASTM D2671
Heat Shock (250°C for 30 min.)	No cracking or flowing	ESI 09-11
Shrink Temperature	125°C	IEC 216
Continuous Temperature Limit	-40 to +100°C	IEC 216
<b>Electrical</b>		
Dielectric Strength	12 KV/mm.(min)	ASTM D149
Volume Resistivity	1 x 10 <sup>14</sup> Ohm.cm (min)	ASTM D257
Dielectric constant	5 (max.)	ASTM D150

### Selection Chart

All dimensions are in mm

CODE NO.	Ds (Min.)	Df (Max.)	Ls (Min.)	Tf(±10%)	CABLE RANGE
GEC 001S	6	2	25	2.0	2 - 4
GEC 001SA	8	2	25	2.0	4 - 6
GEC 001	12	4	40	2.3	4 - 8
GEC 001L	12	4	58	2.3	4 - 8
GEC 001 A	14	4	38	2.3	4 - 11
GEC 001 AL	14	4	58	2.3	4 - 11
GEC 101	20	7.5	55	2.3	8 - 16
GEC 101 L	20	8	75	2.5	8 - 16
GEC 101 A	25	8	55	2.3	8 - 20
GEC 101 AL	25	8	75	2.5	8 - 20
GEC 102	30	11	75	2.5	12 - 26
GEC 102 A	35	11	75	2.5	12 - 30
GEC 102 AL	35	11	105	2.5	12 - 30
GEC 201	40	15	90	3.3	16 - 35
GEC 201 L	40	15	120	3.3	16 - 35
GEC 201 A	45	15	90	3.3	16 - 40
GEC 201 AL	45	15	120	3.3	16 - 40
GEC 301	55	25	125	3.8	25 - 47
GEC 301 L	55	25	170	3.8	25 - 47
GEC 301 A	63	25	125	3.8	25 - 55
GEC 301 AL	63	25	170	3.8	25 - 55
GEC 401	75	35	140	4.0	35 - 68
GEC 401 L	75	35	180	4.0	35 - 68
GEC 401 A	85	36	140	4.0	36 - 78
GEC 401 AL	85	35	180	4.0	36 - 78
GEC 501	100	45	160	4.0	45 - 90
GEC 501 L	100	45	200	4.0	45 - 90
GEC 501 A	120	45	160	4.0	45 - 110
GEC 501 AL	120	45	200	4.0	45 - 110
GEC 601	130	60	155	4.6	64 - 120
GEC 601 L*	130	65	300	4.6	67 - 120
GEC 701	154	60	165	4.6	70 - 145
GEC 701 L*	160	65	300	4.5	70 - 145
GEC 801 S*	190	125	220	4.0	140 - 165
GEC 801*	230	125	220	4.0	140 - 200
GEC 901*	310	120	220	7.0	140 - 280
GEC 1001*	400	204	220	6.0	230 - 360
GEC 1101*	500	200	220	6.0	230 - 460

\* New sizes D : Internal Diameter; s : as supplied; f : after free recovery

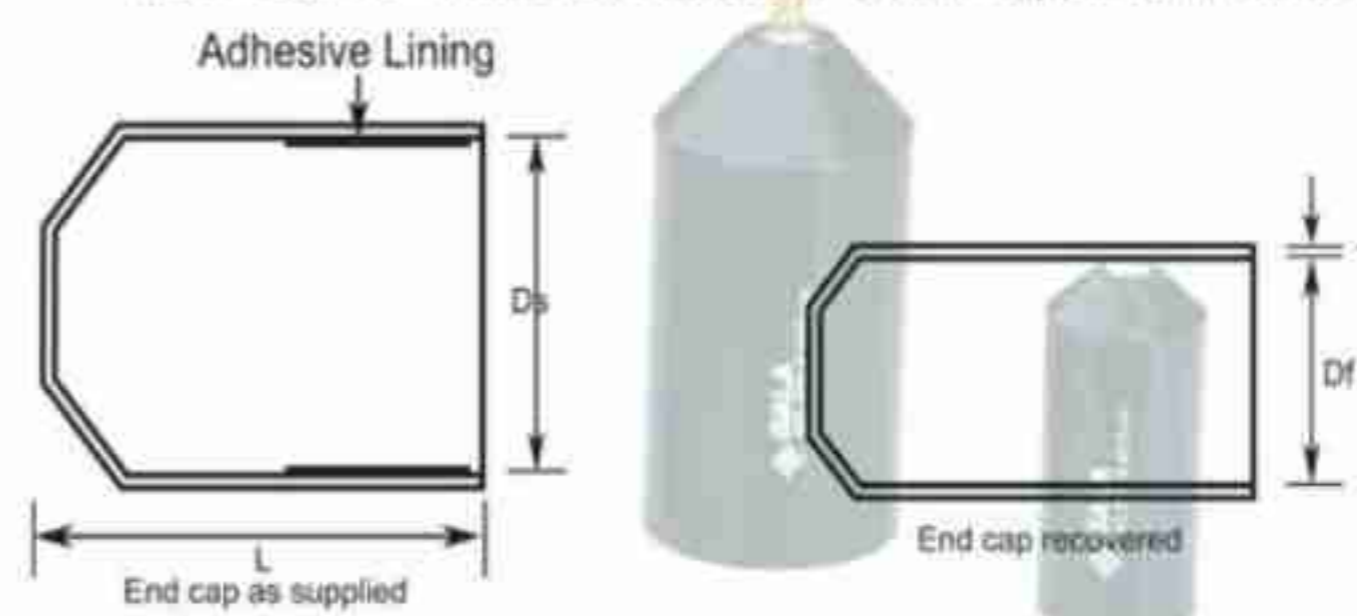

An ISO 9001, ISO 14001 & ISO 45001:2018 Certified Company

# GALA THERMO SHRINK PVT. LTD.

M : 88791 22705 | E: info@galathermo.com | W: www.galathermo.com